

Dilution Control Systems

Multi-Task

U-Fill Foamer Gun Model 421740

U-Fill Sprayer Gun Model 421750

OPERATION

SERVICE

PARTS

CARE



Multi-Task U-Fill Models 421740, 421750

THANK YOU FOR YOUR INTEREST IN OUR PRODUCTS

Please use this equipment carefully and observe all warnings and cautions.

***** NOTE *****

WEAR protective clothing and eyewear when dispensing chemicals, emptying equipment or changing metering tips.

ALWAYS observe safety and handling instructions

ALWAYS direct discharge away from you or other persons or into approved containers.

ALWAYS dispense cleaners and chemicals in accordance with instructions.
Exercise **CAUTION** when maintaining your equipment.

KEEP equipment clean to maintain proper operation.

ALWAYS re-assemble equipment according to instruction procedures. Be sure all components are firmly screwed or latched into position.

ATTACH only to tap water outlets (25 PSI minimum, 85 PSI maximum).

U-Fill Foamer 421740

Instructions

1. Remove all parts from carton.
2. Connect garden hose to gun and water supply spigot..
3. Thread product bottle onto gun, tighten. (Figure 2)
4. With water valve in the off position, turn water supply on at spigot.
5. Flip selector lever, black handle (product port), to the up position. (Figure 1)
6. Aim foamer at wall and turn water valve on.
6. Foam wall starting at the top and work down covering entire surface.
7. Agitate areas if needed.
8. Flip selector lever (white handle) to the up position to begin water rinse, rinse surfaces completely.
9. Turn water valve off when finished.
10. Supply hose must be disconnected from Foamer gun after each use (Figure 3).

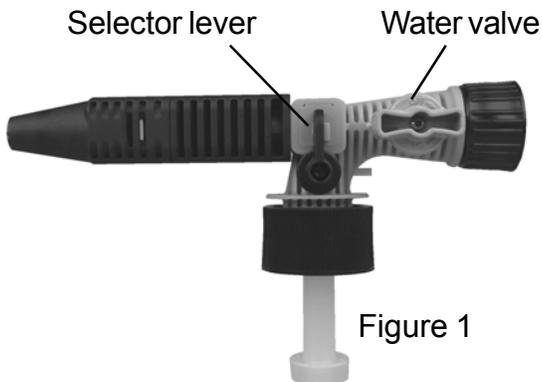


Figure 1

U-Fill Sprayer 421750

Instructions

1. Remove all parts from carton.
2. Connect garden hose to water supply spigot.
3. Thread product bottle onto gun, tighten.
4. Flip selector lever, black handle (product port) to the up position .
5. With water valve in the off position, turn water supply on at spigot.
6. Aim sprayer toward surface to be cleaned and turn water valve on.
7. Spray surface to be cleaned.
8. Agitate areas if needed.
9. Turn gray handle ball valve off.
10. Flip selector lever (white handle) to up position to rinse.
11. Turn water valve to on and rinse surfaces.
12. Supply hose must be disconnected from Sprayer gun after each use (Figure 3).



Figure 2



Figure 3



600 Cardigan Road
Shoreview, Minnesota 55126
Phone 651-481-1900
Fax 651-481-9987
Web www.multi-clean.com

988442
Printed in U.S.A.